

简体中文 便携高清无损音乐播放器

开/关机

长按电源/锁屏键开机,首次开机时,选择相应语言,点击完成进入主界面;开机状态下 长按电源/锁屏键出现关机提示框,可选择关机或重启。

M23支持快充,为达到设计的充电时间,推荐选用符合PD3.0或以上的充电器。

Type-C接口

M23底部有2个Type-C的USB端口,标识USB3.0的端口,支持数据传输/充电、 USB HOST、USB OTG等功能;标识POWER IN的端口,仅支持充电/供电功能, 不能连接电脑传输数据。

返回上一级:从屏幕左侧边缘向右滑动或屏幕右侧边缘向左滑动 返回桌面:从屏幕下方上滑 多任务管理:从屏幕下方上滑并停留

M23拥有6种工作模式,分别为安卓模式、纯音模式、USB DAC模式、蓝牙接收模式、 AirPlav和Roon Readv模式,首次开机将默认为安卓模式,您可以在下拉菜单,或设置 菜单中点击工作模式来切换不同的工作模式。

● 安卓模式/纯音模式:

安卓模式/纯音模式下可连接电脑与M23传输数据。

before using the USB DAC function.

Bluetooth Receiving mode

AirPlay mode

charged:

charged.

HOLD switch

• Roon Ready mode

注:MAC系统的MTP驱动、以及Windows系统的USB DAC驱动可查看本机FIIO Driver 磁盘,或者通过下载地址:https://www.fiio.com/Driver_Download进行下载。

2

首次切换到USB解码模式时,您需要前往官网下载USB DAC驱动,并按照相应教程 安装驱动后方可使用USB解码功能。

When switching to the USB DAC mode for the first time, please download the

When switching to the Bluetooth Receiving mode for the first time, the M23 will

When working in AirPlay mode, the M23 requires a valid WiFi connection. Please

confirm that it is connected to an available network before entering the AirPlay

When working in Roon Ready mode, the M23 needs to connect to the same LAN

When switching to ON, the desktop mode is enabled, and the battery will not be

when switching to OFF, the desktop mode is disabled, and the battery will be

When the HOLD switch is turned on, all buttons on the side of the M23 will be

locked to prevent unintended touches as default (You can choose the button

that will still be available on the settings menu beforehand). When the HOLD

as the Roon Server. Search the M23 on the Roon Server and select it, and the

automatically enter the pairing state. The next time it enters Bluetooth Receiving

USB DAC driver on our website and follow relevant instructions to install it

mode, it will reconnect to the last connected device automatically.

M23 can control the Roon server for music playing.

Desktop mode switch (D.MODE)

switch is turned off, all buttons will be available.

Portable High Resolution Music Player

便携高清无损音乐播放器 简体中文

● 蓝牙接收模式: 首次切换到蓝牙接收模式时,M23将自动进入配对状态,后续再次进入蓝牙接收模式

时将自动回连上一次连接设备。

● AirPlav模式:

AirPlay模式工作时,M23需要接入WiFi网络,进入AirPlay前请确认M23已连接正常可 用的网络。

Roon Ready:

Roon Readv模式工作时,M23需要与Roon服务端接入同一个局域网,在Roon服务端 选择搜索到的M23音频设备后,即可正常控制服务端播放音乐。

台机模式(D.MODE)开关功能

开关拨到ON, 台机模式开启, 此时电池将不充电。 开关拨到OFF,台机模式关闭,此时电池可正常充电。

HOLD开关启用后,M23侧面按键将会被锁定无法操作,防止误触。您可以在设置菜单 中选择需要锁定操作的按键,或者通过取消HOLD开关来恢复按键功能。

当检测到快充适配器插入时,增益设置会新增"大耳模式"菜单,同时系统会弹窗提示 是否需要启用大耳模式,请根据需要选择是否启用。

固件升级

● OTA在线升级

打开WiFi并连接到可用网络即可自动检测是否有新版本固件更新。若未检测到新版本, 可尝试前往"技术支持-固件升级-在线升级",点击"检查更新"进行手动检测更新。

请前往官网下载升级固件,并按相应教程进行版本升级。

下载地址:http://www.fiio.com/supports

Portable High Resolution Music Player

Super High Gain mode

When a fast-charging power adapter is inserted in the M23 and is detected, the "Super High Gain mode" will show up on the GAIN settings menu. Meanwhile, a dialogue prompt of "Switch to Super High Gain mode?" will pop up, and you can decide whether to switch or not based on your needs.

Firmware Upgrade

• OTA (Over-the-Air) online upgrade

Turn on the WiFi function on the M23 and connect it to an available network. It will automatically detect if there is a new firmware. If no firmware is detected, please go to "Technical Support -> Firmware Update -> Online Upgrade" to check and upgrade the firmware manually.

• Local upgrade

Please download the firmware on our website and follow relevant instructions to upgrade it. Download link: http://www.fiio.com/supports

Notes and Precautions

★Please do not put the battery in a high-temperature environment. The battery is prohibited from use if it is soaked in water, or if it gets swollen. Please do not disassemble, hit, crush, or puncture the battery, and do not put it on fire. ★Please do not place the device in circumstances of excessive high/low temperatures (above 45°C or below 0°C), or in an enclosed high-temperature

environment, such as in a car. ★Please do not repair or disassemble the product on your own and do not put

it in water. ★Please charge the battery on a regular basis to secure the battery life if this product has not been used for a long time.

★You might not be able to hear the sound of the surroundings when using headphones. For your safety, please avoid using headphones in dangerous

Portable High Resolution Music Player

★请勿将电池置于高温环境中,电池浸水后禁止使用,若出现鼓胀,请勿继续使用。

★请勿将设备置于温度过高或过低(45°C以上0°C以下),请勿将设备放置在车内等

★当您在使用耳机时,会因此听不清外界环境声音,为了您的安全,请避免在危险环境

★搭配电压过高的充电适配器充电可能会损坏机器,请选择推荐使用的充电器进行

★系统发生故障导致死机时,可尝试长按"电源/锁屏键"10秒以上,强制重启机器。

● 镜片保护膜(出厂贴在主机上)

● 快速入门

★当长期没有使用本产品时,需要定期给产品充电,以保证电池寿命。

禁止拆解、撞击、挤压、刺破电池或将电池投入火中。

★不可自行维修、拆卸和将产品放在有水的地方。

包装清单(请核对包装内是否包括以下物品)

● 卡针

● 有关M23的相关视频说明和常见问题解答(FAQ),

● 在M23的"设置-系统-法律信息"中,可以查看产品

● 了解产品更多信息请访问飞傲官网介绍:

\bigstar It is recommended to use a suitable charger in case of a high-voltage adapter causing damage to the device.

★In the likely event that the M23 hangs up, you may hold the Power/Lock button for over 10 seconds to force a reboot.

List of Items Included(please check if the following items are included)

• Screen protector (applied on the M23 in factory) Eiector pin Protective case USB data cable

Quick start guideWarranty card

To Learn More

简体中文

注意事项

密闭高温环境中。

中使用耳机。

● M23主机

● USB数据线


了解更多

请扫描M23 FAQ 二维码。

http://www.fiio.com

的CMIIT -ID

• For related video instructions of the M23 and FAO (Frequently Asked Questions). please scan the QR code below.



• To check the CMIIT-ID of the M23, please go to the menu of Settings->System->Legal information.

Due to continuous improvement, every specification and design is subject to change at any time without further notice.

便携高清无损音乐播放器

产品型号:F3081M 额定输入:5V=2A 尺寸:约75.7x136.5x18.1mm 重量:约299g(深蓝色)/392.3g(不锈钢)

产品名称:便携高清无损音乐播放器

执行标准:Q/FADZ 1-2017 制造厂:广州飞傲电子科技有限公司 地址:广州市白云区龙归街夏良龙良路21号

由于产品不断改进,各项规格及设计随时更改,恕不另行通知。

环保材料说明

简体中文

便携高清无损音乐播放器

● 主机保护套

● 售后维修卡

产品中有害物质的名称及含量

	有害物质					
部件名称	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr,VI)	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
PCB	Х	0	0	0	0	0
PCBA 焊点	Х	0	0	0	0	0
元器件	Х	0	0	0	0	0
显示屏*	Х	0	0	0	0	0
电池*	Х	0	0	0	0	0
外观件	0	0	0	0	0	0
配件*	Х	0	0	0	0	0
注:表中标记"X"的部件,皆因全球技术发展水平限制而无法实现有害物质的替代。带*号部件表示如果在您所购买的						

产品中无该部件,请忽略表中该部件信息。 O·表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572-2011规定的限量要求以下。 X: 表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572-2011规定的限量要求。 根据中国电子行业标准S.I/T 11364-2014 和相关的中国政府法规,本产品及其某些内部或外部组件上可能带有环保信

用期限标识。取决于组件和组件制造商,产品及其组件上的使用期限标识可能有所不同。组件上的使用期限标识优先引 产品上任何与之相冲空的或不同的环保使用期限标

● 此环保使用期限只适用于产品在规定的条件下工作

WEEE Directive & Product Disposal

At the end of its serviceable life, this product should not be handed as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

Internal/Supplied Batteries: This symbol on the battery indicates that the battery is to be collected separately. This battery is designed for separate collection at an appropriate

collection point. Qualcomm is a trademark of Qualcomm Incorporated, registered in the United States and other countries. aptX is a trademark of Qualcomm Technologies

International Ltd., registered in the United States and other countries. Qualcomm* aptX"HD

Hereby, Guangzhou FIIO Electronics Technology Co., Ltd declares that this device is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at: www.fiio.com/doc

Function Frequency Maximum output power Bluetooth 2402-2480MHz 9.27dBm 2412-2472MHz 9 27dRm 5180-5320MHz 9.27dBm 5500-5825MHz 9.27dBm

For this radio device, the following restrictions on putting into service or of requirements for authorisation of use apply in BE, BG, CZ, DK, DE, EE, IE, EL, ES, FR, HR, IT, CY, LV, LT, LU, HU, MT, NL, AT, PL, PT, RO, SI, SK, FI, SE, UK, IS, LI, NO, CH,TR:5150-5350 MHz band is restricted to indoor operations only.


11

headphone out /line out

Buttons and Ports Labeled (Pictures are for reference only. The

actual product may vary)

Portable High Resolution Music Player

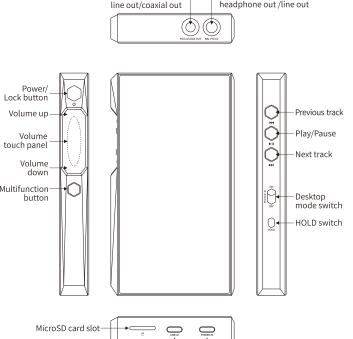

Type-C data/charging port Type-C charging/power in port

Portable High Resolution Music Player

FCC NOTICE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following

• Reorient or relocate the receiving antenna.

• Increase the separation between the equipment and receiver. • Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

• Consult the dealer or an experienced radio/TV technician for help. The equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. The equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Master Quality Authenticated

The M23 includes MQA technology, which enables you to play back MQA audio files and streams, delivering the sound of the original master recording. The M23 Now Playing screen shows green or blue dot next to MQA logo to indicate that the unit is decoding and playing an MQA stream or file, and denotes provenance to ensure that the sound is identical to that of the source material. It shows blue dot to indicate it is playing an MOA Studio file, which has either been approved in the studio by the artist/producer or has been verified by the copyright owner.

12

Portable High Resolution Music Player

Power on/off

English

The bottom of the M23 has two Type-C ports. The one marked USB3.0 supports data transfer, charging, USB HOST, USB OTG and so on. The other that marked POWER IN only supports charging/power supply but not data transfer with

Multitask managing: Swipe up from the bottom edge of the screen and then hold. **Working modes switch**

 Android mode/Pure Music mode Under the Android mode/Pure Music mode, the M23 can be connected to a computer for data transmission.

The M23 has six working modes: Android mode, Pure Music mode, USB DAC

mode, Bluetooth Receiving mode, AirPlay mode and Roon Ready mode. The

off or reboot the player. Charging

computers. **Gesture Operation**

Type-C port

M23 will default to enter Android mode when it powers on for the first time. You can switch to other working modes on the drop-down or Settings menu.

https://www.fiio.com/Driver_Download

Portable High Resolution Music Player

Hold the Power/Lock button to turn on the M23. On its first startup, tap the

preferred language onscreen to enter the main UI. Hold the Power/Lock button

while the M23 is on and a shutdown dialogue will pop up. You can select to turn

The M23 supports fast charging. To achieve the designed charging time, it is

recommended to use a PD3.0 or above power source.

Return to previous menu: Swipe right from the left edge of the screen, or swipe $% \left(1\right) =\left(1\right) \left(1\right) \left$ left from the right edge. Return to homepage: Swipe up from the bottom edge of the screen.

Note: The MTP driver for MAC and USB DAC driver for Windows can be found on

the local FIIO Driver disk, or you can download them at